



Chapter 1: Introduction



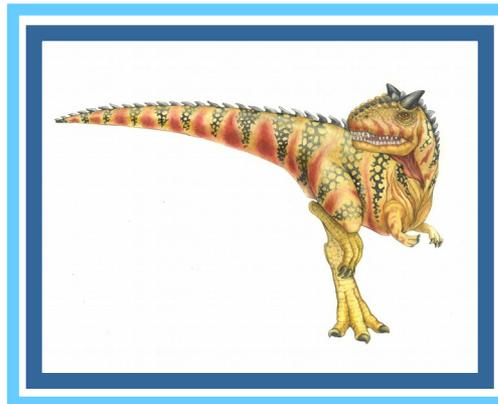

Introduction


- What Operating Systems Do
- Computer-System Organization
- Computer-System Architecture
- Operating-System Operations
- Resource Management
- Security and Protection
- Virtualization
- Computing Environments
- Free/Libre and Open-Source Operating Systems






Objectives


- Describe the general organization of a computer system and the role of interrupts
- Describe the components in a modern, multiprocessor computer system
- Illustrate the transition from user mode to kernel mode
- Discuss how operating systems are used in various computing environments
- Provide examples of free and open-source operating systems







Computer System Structure

- Computer system can be divided into four components:
 - Hardware – provides basic computing resources
 - ▶ CPU, memory, I/O devices
 - Operating system
 - ▶ Controls and coordinates use of hardware among various applications and users
 - Application programs – define the ways in which the system resources are used to solve the computing problems of the users
 - ▶ Word processors, compilers, web browsers, database systems, video games
 - Users
 - ▶ People, machines, other computers






Abstract View of Components of Computer

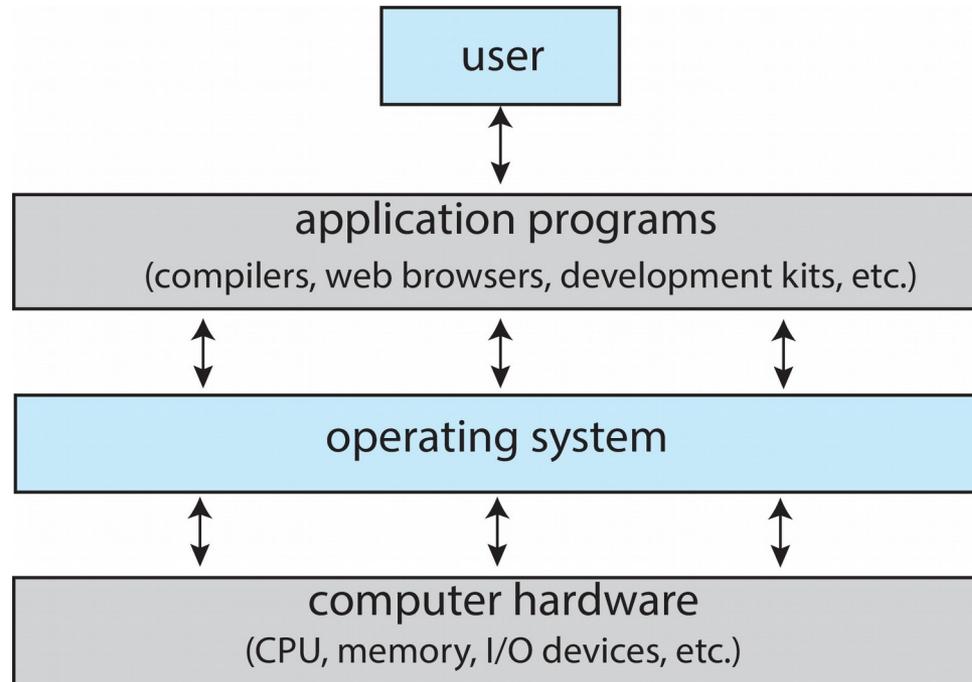



What Operating Systems Do

- Depends on the point of view
- Users want convenience, **ease of use** and **good performance**
 - Don't care about **resource utilization**
- But shared computer such as **mainframe** or **minicomputer** must keep all users happy
 - Operating system is a **resource allocator** and **control program** making efficient use of HW and managing execution of user programs
- Users of dedicated systems such as **workstations** have dedicated resources but frequently use shared resources from **servers**
- Mobile devices like smartphones and tables are resource poor, optimized for usability and battery life
 - Mobile user interfaces such as touch screens, voice recognition
- Some computers have little or no user interface, such as embedded computers in devices and automobiles
 - Run primarily without user intervention





Defining Operating Systems


- Term OS covers many roles
 - Because of myriad designs and uses of OSES
 - Present in toasters through ships, spacecraft, game machines, TVs and industrial control systems
 - Born when fixed use computers for military became more general purpose and needed resource management and program control





Operating System Definition (Cont.)



- **No universally accepted definition**
- “Everything a vendor ships when you order an operating system” is a good approximation
 - But varies wildly
- “The one program running at all times on the computer” is the **kernel**, part of the operating system
- Everything else is either
 - a **system program** (ships with the operating system, but not part of the kernel) , or
 - an **application program**, all programs not associated with the operating system
- Today’s OSeS for general purpose and mobile computing also include **middleware** – a set of software frameworks that provide addition services to application developers such as databases, multimedia, graphics





Computer System Organization


- Computer-system operation
 - One or more CPUs, device controllers connect through common **bus** providing access to shared memory
 - Concurrent execution of CPUs and devices competing for memory cycles

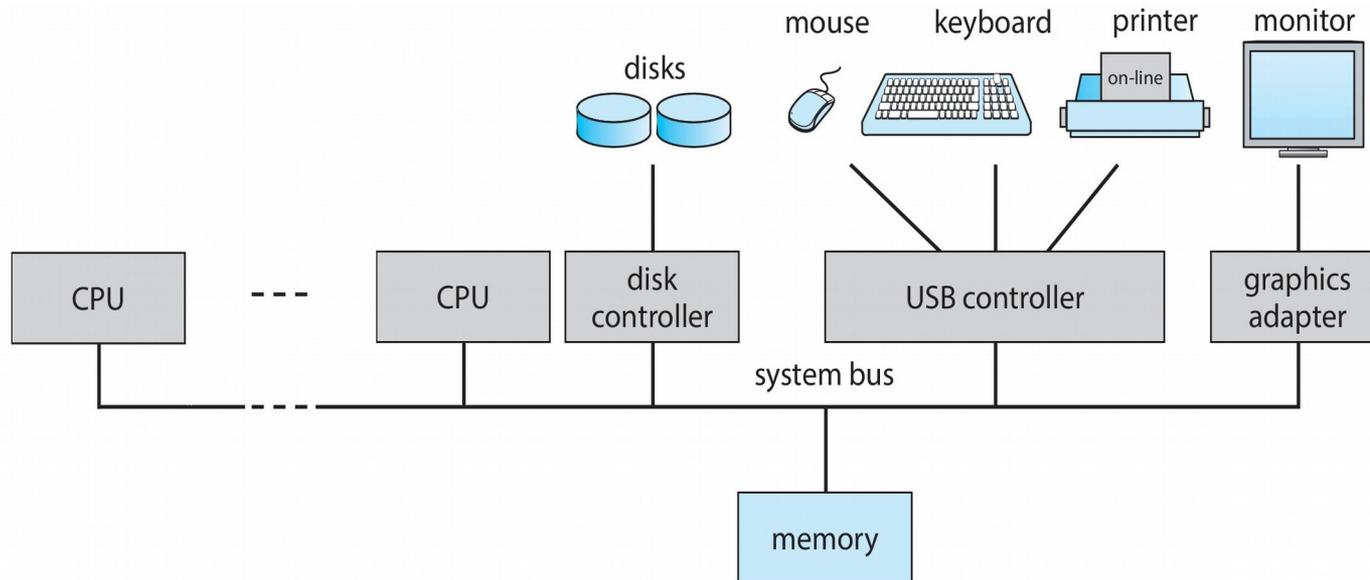




Computer-System Operation


- I/O devices and the CPU can execute concurrently.
- Each device controller is in charge of a particular device type.
- Each device controller has a local buffer.
- Each device controller type has an operating system **device driver** to manage it.
- CPU moves data from/to main memory to/from local buffers.
- I/O is from the device to local buffer of controller
- Device controller informs CPU that it has finished its operation by causing an **interrupt**








Common Functions of Interrupts

- Interrupt transfers control to the interrupt service routine generally, through the **interrupt vector**, which contains the addresses of all the service routines
- Interrupt architecture must save the address of the interrupted instruction and in general the state of the CPU and be able to restore that state later.
- A **trap** or **exception** is a software-generated interrupt caused either by an error or a user request
- An operating system is **interrupt driven** – it only runs as a result of interrupts (including exceptions).
- Usually two interrupt lines, one **non-maskable**, for events that must be handled immediately, and one for **maskable** interrupts, which can be turned off (deferred usually) by the CPU.





Interrupt Timeline

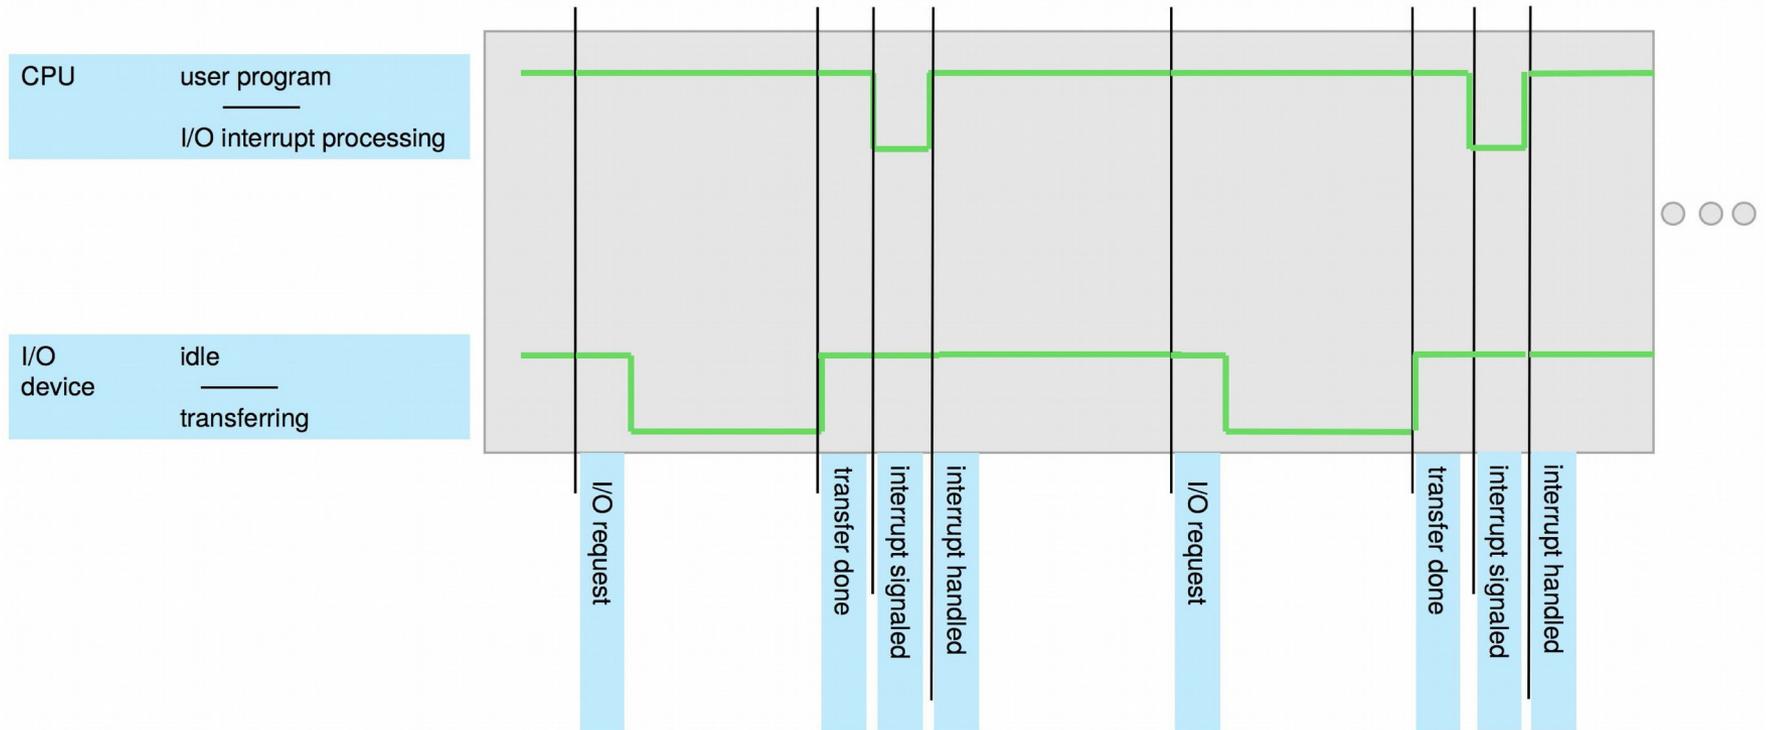




Interrupt Handling

- The operating system preserves the state of the CPU by storing registers and the program counter
- Determines which type of interrupt has occurred:
 - vectored interrupt system
 - polling to determine which device
 - hybrid – interrupt vector with linked list of devices (when number of devices exceeds table size)
- Separate segments of code determine what action should be taken for each type of interrupt – **interrupt service routines**, also called **interrupt handlers**





Interrupt-driven I/O Cycle

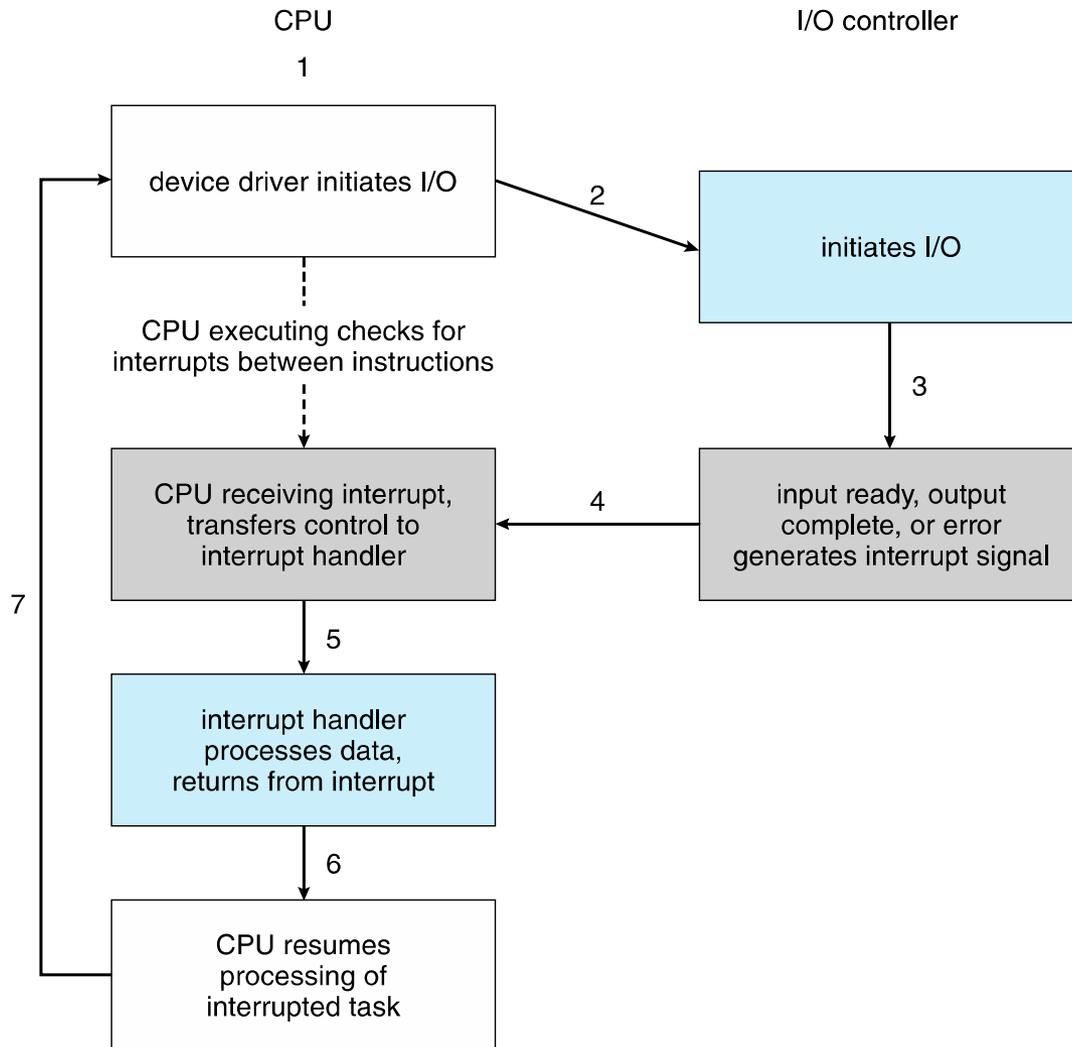




Synchronous vs Asynchronous I/O

- **Synchronous:** After I/O starts, control returns to user program only upon I/O completion
 - Wait instruction idles the CPU until the next interrupt
 - Wait loop (contention for memory access)
 - At most one I/O request is outstanding at a time, no simultaneous I/O processing


- **Asynchronous:** After I/O starts, control returns to user program without waiting for I/O completion
 - **System call** – request to the OS to allow user to wait for I/O completion
 - **Device-status table** contains entry for each I/O device indicating its type, address, and state
 - OS indexes into I/O device table to determine device status and to modify table entry to include interrupt





Storage Structure

- Main memory – only large storage medium that the CPU can access directly
 - **Random access**
 - Typically **volatile**
 - Typically **random-access memory** in the form of **Dynamic Random-access Memory (DRAM)**
- Secondary storage – extension of main memory that provides large **nonvolatile** storage capacity
- **Hard Disk Drives (HDD)** – rigid metal or glass platters covered with magnetic recording material
 - Disk surface is logically divided into **tracks**, which are subdivided into **sectors**
 - The **disk controller** determines the logical interaction between the device and the computer
- **Non-volatile memory (NVM)** devices– faster than hard disks, nonvolatile
 - Various technologies
 - Becoming more popular as capacity and performance increases, price drops






Storage Definitions and Notation Review

The basic unit of computer storage is the **bit**. A bit can contain one of two values, 0 and 1. All other storage in a computer is based on collections of bits. Given enough bits, it is amazing how many things a computer can represent: numbers, letters, images, movies, sounds, documents, and programs, to name a few. A **byte** is 8 bits, and on most computers it is the smallest convenient chunk of storage. For example, most computers don't have an instruction to move a bit but do have one to move a byte. A less common term is **word**, which is a given computer architecture's native unit of data. A word is made up of one or more bytes. For example, a computer that has 64-bit registers and 64-bit memory addressing typically has 64-bit (8-byte) words. A computer executes many operations in its native word size rather than a byte at a time.


Computer storage, along with most computer throughput, is generally measured and manipulated in bytes and collections of bytes. A **kilobyte**, or **KB**, is 1,024 bytes; a **megabyte**, or **MB**, is $1,024^2$ bytes; a **gigabyte**, or **GB**, is $1,024^3$ bytes; a **terabyte**, or **TB**, is $1,024^4$ bytes; and a **petabyte**, or **PB**, is $1,024^5$ bytes. Computer manufacturers often round off these numbers and say that a megabyte is 1 million bytes and a gigabyte is 1 billion bytes. Networking measurements are an exception to this general rule; they are given in bits (because networks move data a bit at a time).






Storage Hierarchy

- Storage systems organized in hierarchy
 - Speed
 - Cost
 - Volatility
- **Caching** – copying information into faster storage system; main memory can be viewed as a cache for secondary storage
- **Device Driver** for each device controller to manage I/O
 - Provides uniform interface between controller and kernel






Storage-Device Hierarchy

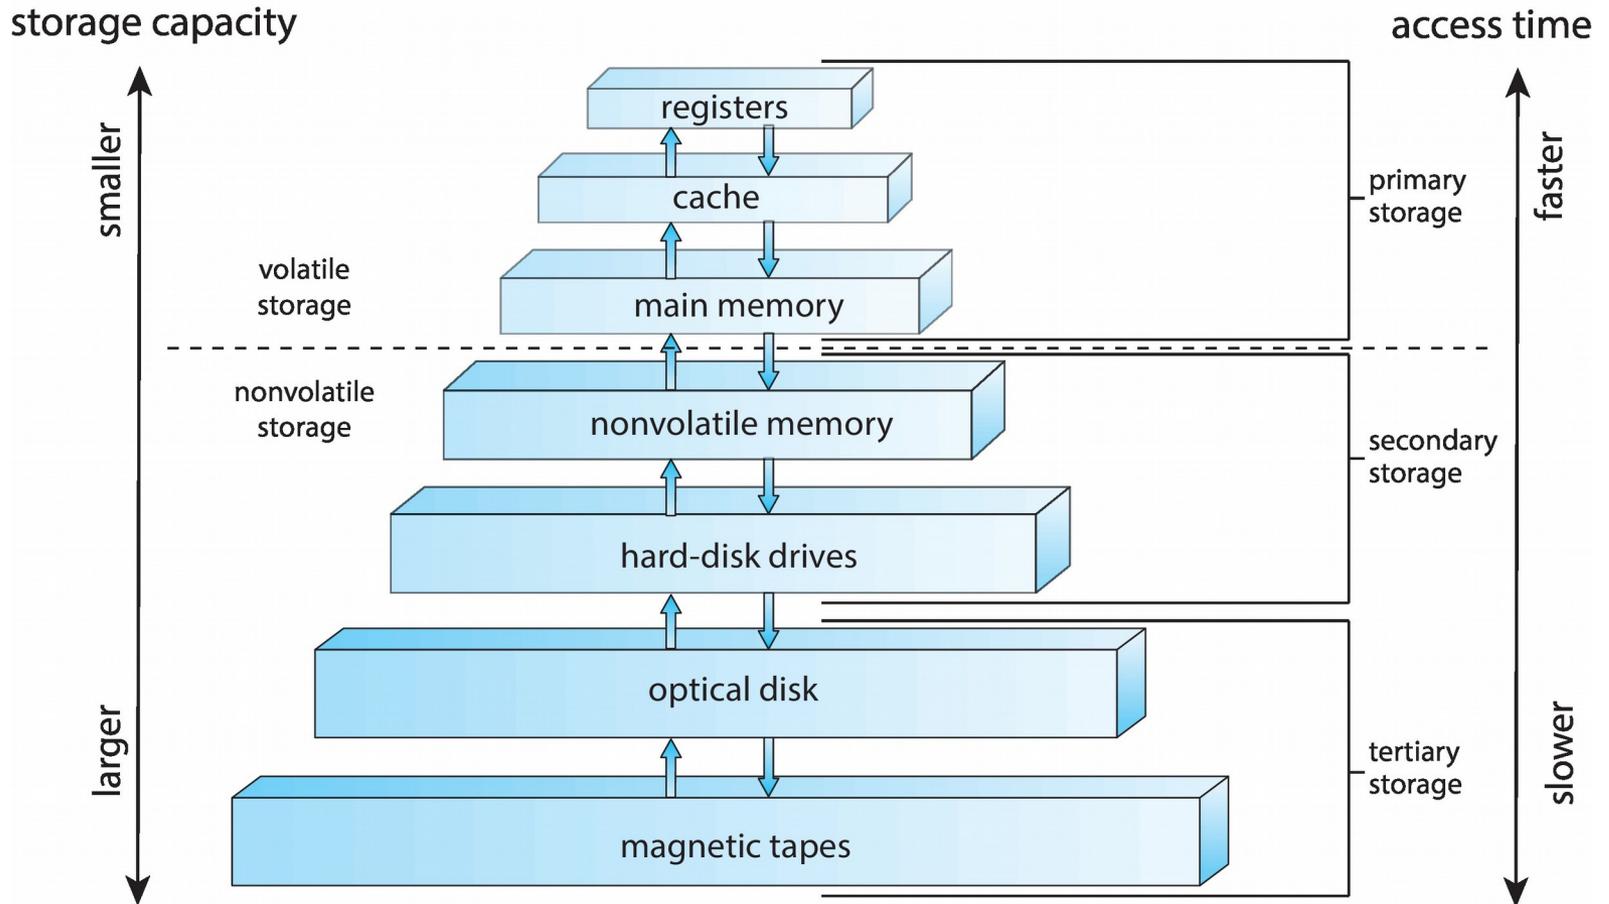




How a Modern Computer Works

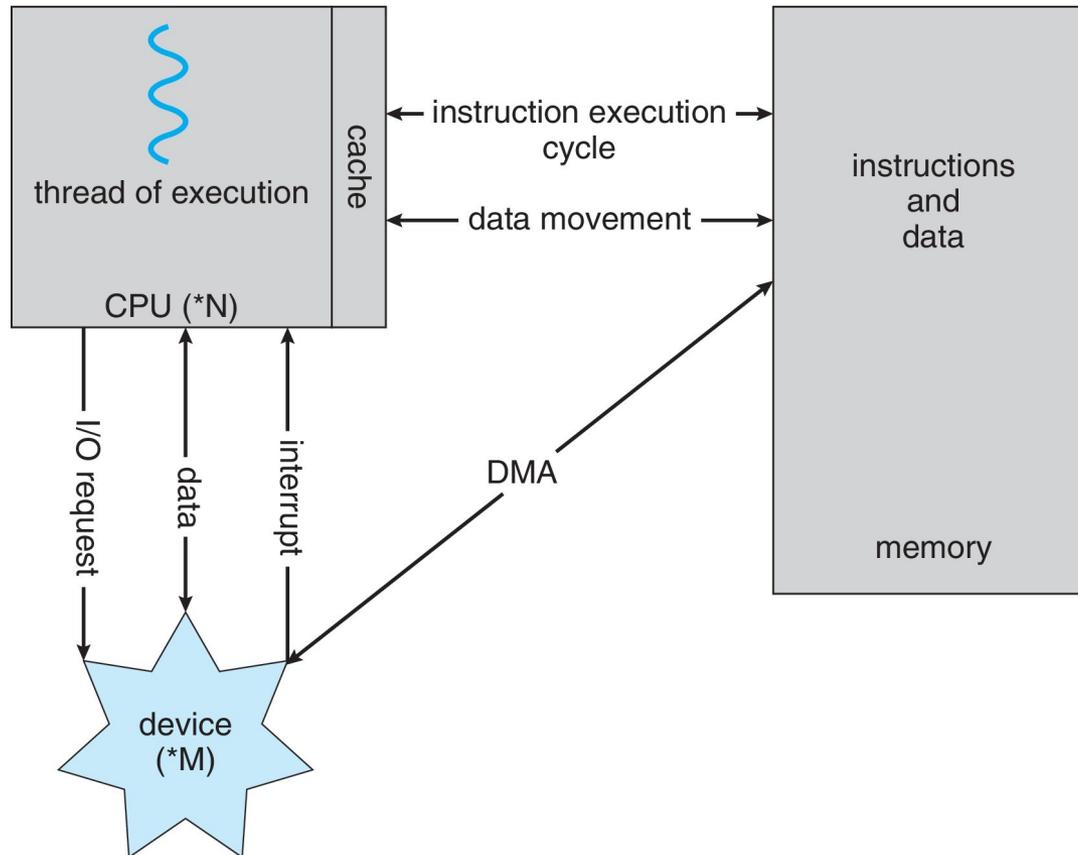

A von Neumann architecture





Direct Memory Access Structure

- Used for high-speed I/O devices able to transmit information at close to memory speeds
- Device controller transfers blocks of data from buffer storage directly to main memory without CPU intervention. (CPU needs to set up transfer first.)
- Only one interrupt is generated per block, rather than the one interrupt per byte







Computer-System Architecture


- Most systems used to use a single general-purpose processor. Now most use more than one.
 - Most systems have special-purpose processors as well
- **Multiprocessors** systems growing in use and importance
 - Also known as **parallel systems**, **tightly-coupled systems**
 - Advantages include:
 1. **Increased throughput**
 2. **Economy of scale**
 3. **Increased reliability** – graceful degradation or fault tolerance
 - Two types:
 1. **Asymmetric Multiprocessing** – each processor is assigned a specific task.
 2. **Symmetric Multiprocessing** – each processor performs all tasks







2-Processor Symmetric Multiprocessing Architecture

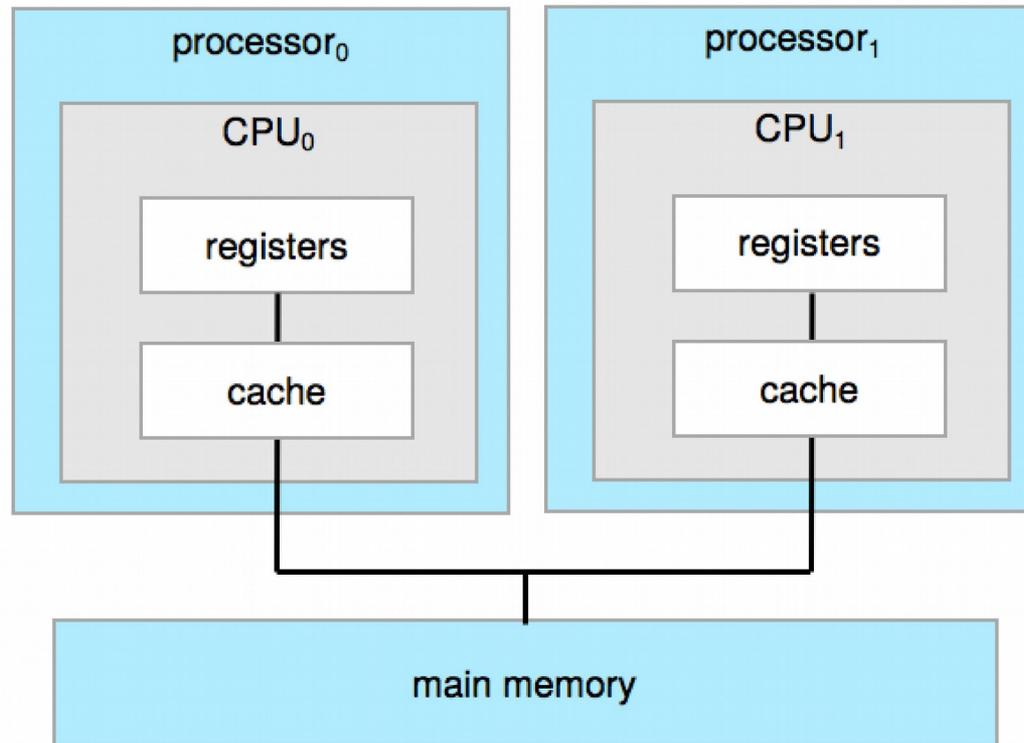





A Dual-Core Design

- Multi-chip and **multicore**
- Systems containing all chips
 - Chassis containing multiple separate systems

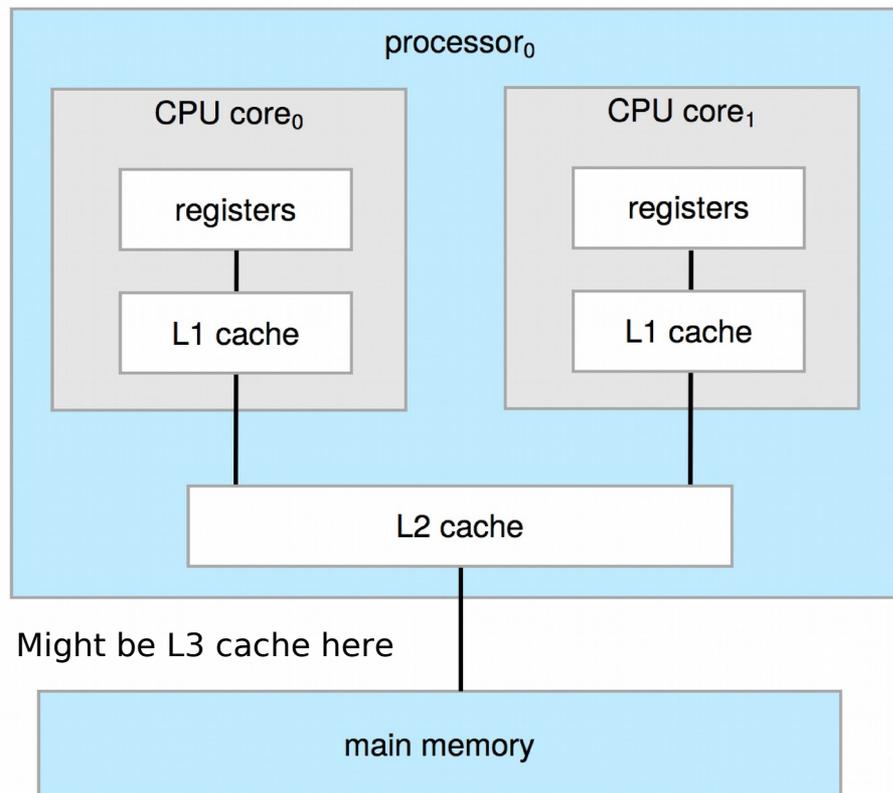



Non-Uniform Memory (NUMA) Access System

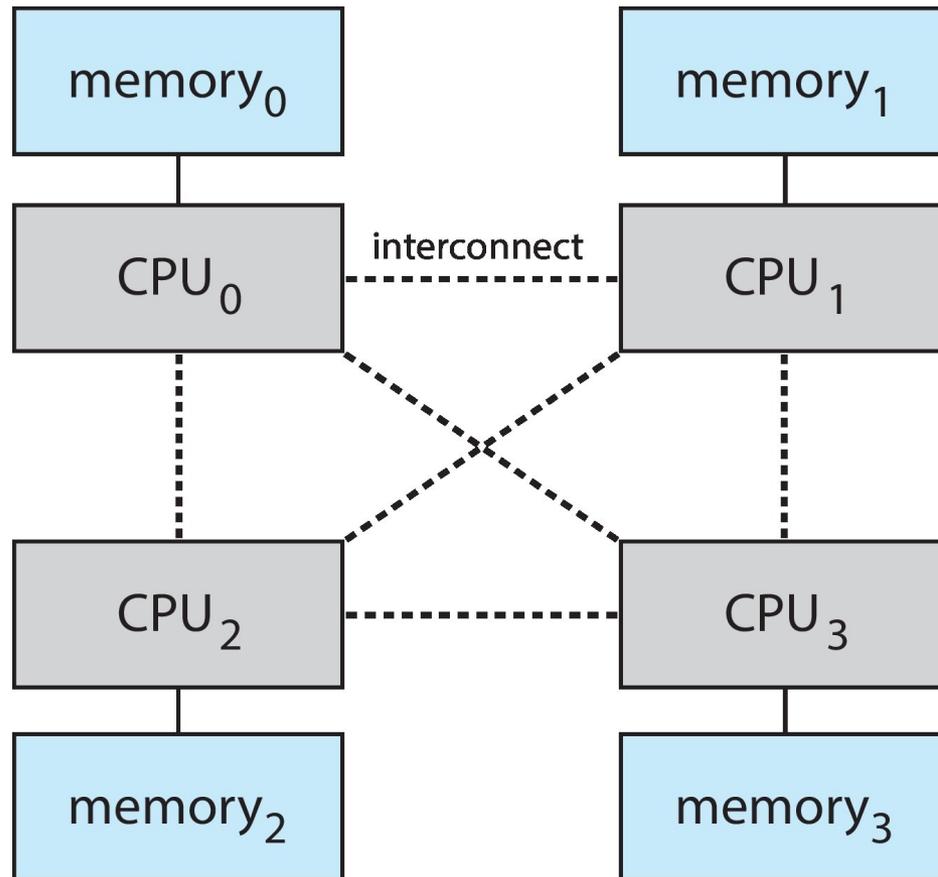






Clustered Systems

- Like multiprocessor systems, but multiple systems working together
 - Usually sharing storage via a **storage-area network (SAN)**
 - Provides a **high-availability** service which survives failures
 - ▶ **Asymmetric clustering** has one machine in hot-standby mode
 - ▶ **Symmetric clustering** has multiple nodes running applications, monitoring each other
 - Some clusters are for **high-performance computing (HPC)**
 - ▶ Applications must be written to use **parallelization**
 - Some have **distributed lock manager (DLM)** to avoid conflicting operations






A Clustered System

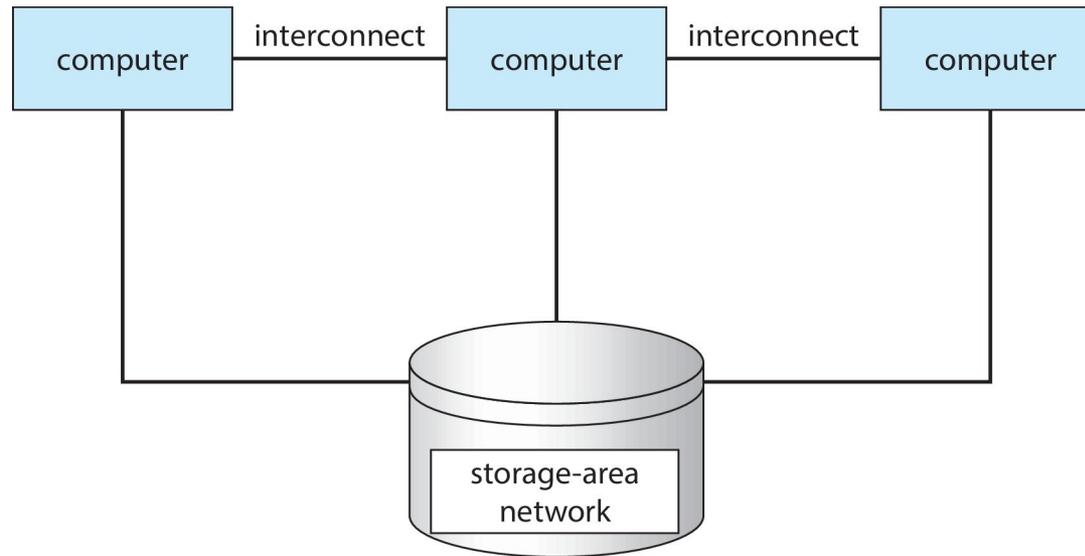




PC Motherboard

Consider the desktop PC motherboard with a processor socket shown below:

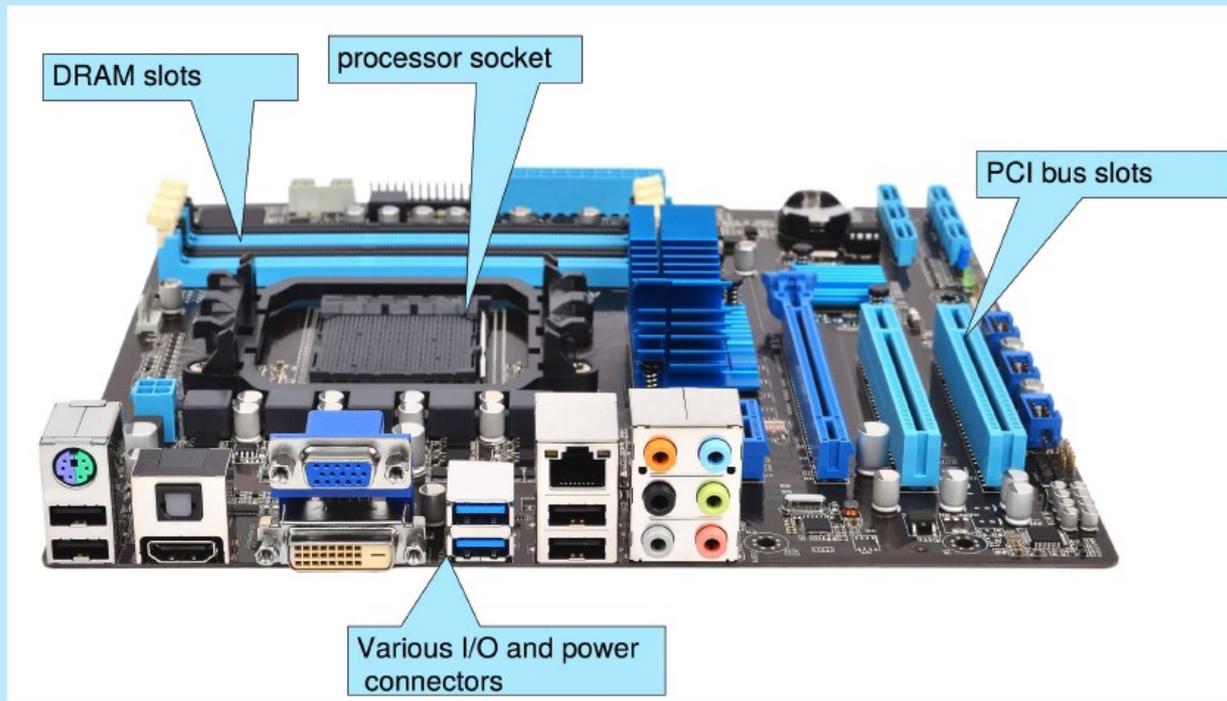


This board is a fully-functioning computer, once its slots are populated. It consists of a processor socket containing a CPU, DRAM sockets, PCIe bus slots, and I/O connectors of various types. Even the lowest-cost general-purpose CPU contains multiple cores. Some motherboards contain multiple processor sockets. More advanced computers allow more than one system board, creating NUMA systems.





Operating-System Operations

- Bootstrap program – simple code to initialize the system, load the kernel
- Kernel loads
- Starts **system daemons** (services provided outside of the kernel)
- Kernel **interrupt driven** (hardware and software)
 - Hardware interrupt by one of the devices
 - Software interrupt (**exception** or **trap**):
 - ▶ Software error (e.g., division by zero)
 - ▶ Request for operating system service – **system call**
 - ▶ Other process problems include infinite loop, processes modifying each other or the operating system





Multiprogramming

- **Multiprogramming** means keeping more than one program in memory at a time.
 - A single program cannot keep CPU and I/O devices busy at all times.
 - Allows several programs to be run simultaneously.
 - Multiprogramming allows OS to switch programs so that CPU always has one to execute.
 - When running process requests I/O, CPU is given to a process that can make progress.
 - Increases **CPU utilization** (*fraction of time CPU is doing useful work*).





Batch Processing and Multitasking



- **Batch processing** is one kind of multiprogramming system:
 - Processes jobs in bulk, with predetermined input from files or other data sources.
 - A subset of total jobs in system is kept in memory
 - One job selected and run via **job scheduling**
 - Each job is *run to completion*.

- **Multitasking** is a kind of multiprogramming system in which processes get small time slices.
 - It is a form of **timesharing system**.
 - CPU switches jobs so frequently that users can interact with each job while it is running, creating **interactive** computing.
 - **Response time** should be fast
 - If several jobs ready to run at the same time **CPU scheduling** is used
 - If processes don't fit in memory, **swapping** moves them in and out to run
 - **Virtual memory** allows execution of processes not completely in memory






Memory Layout for Multiprogrammed System

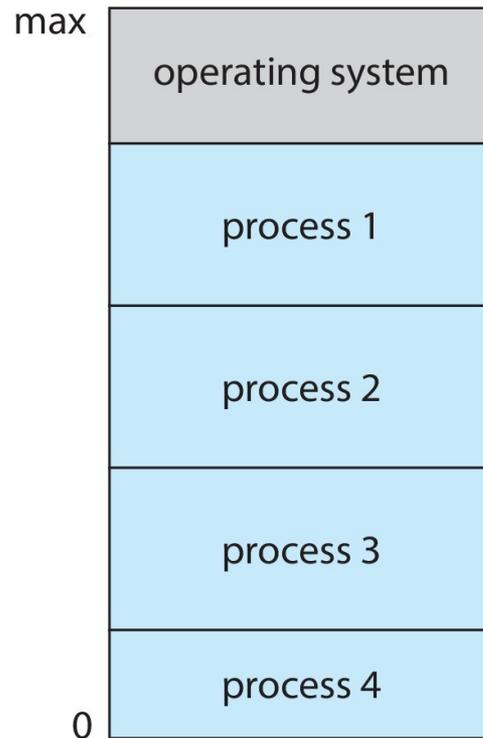




Dual-mode and Multimode Operation


- **Dual-mode** operation allows OS to protect itself and other system components. Two modes:
 - **User mode** and **kernel mode (aka privileged mode, supervisor mode)**
 - **Mode bit** provided by hardware
 - ▶ Provides ability to distinguish when system is running user code or kernel code
 - ▶ Some instructions designated as **privileged**, only executable in **kernel mode**
 - ▶ System call changes mode to kernel, return from call resets it to user
- Increasingly CPUs support multi-mode operations
 - i.e. **virtual machine manager (VMM)** mode for guest **VMs**





Transition from User to Kernel Mode


- **Timer** to prevent infinite loop / process hogging resources
 - Timer is set to interrupt the computer after some time period
 - Keep a counter that is decremented by the physical clock
 - Operating system set the counter (privileged instruction)
 - When counter is zero, generate an interrupt
 - Set up before scheduling process to regain control or terminate program that exceeds allotted time

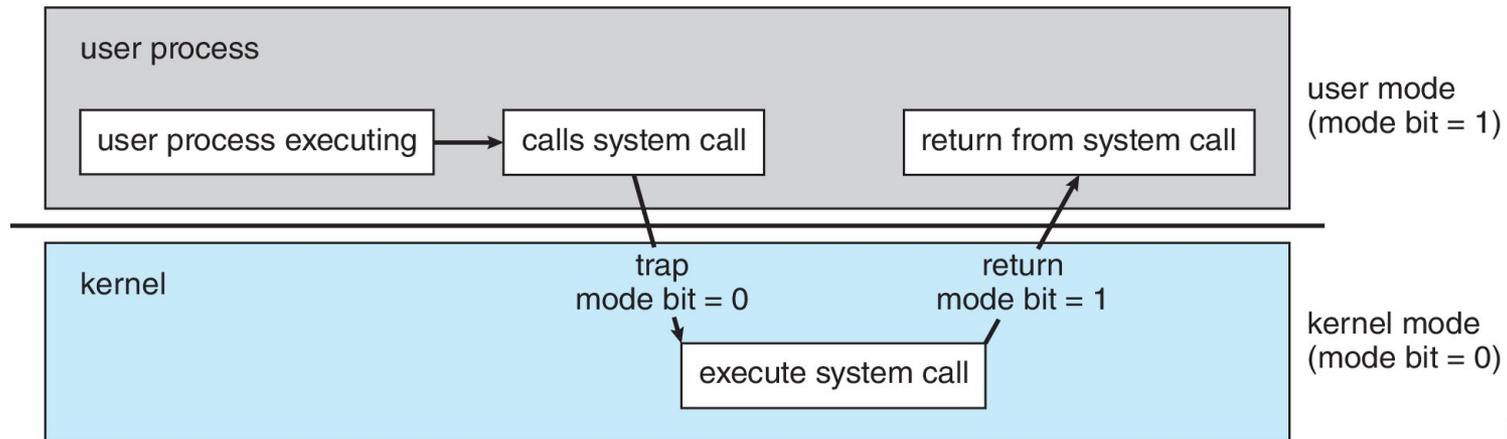



Process Management

- ***A process is a program in execution.*** It is a unit of work within the system. Program is a **passive entity**, process is an **active entity**.
- Process needs resources to accomplish its task
 - CPU, memory, I/O, files
 - Initialization data
- Process termination requires reclaiming any reusable resources
- Single-threaded process has one **program counter** specifying location of next instruction to execute
 - Process executes instructions sequentially, one at a time, until completion
- Multi-threaded process has one program counter per thread
- Typically system has many processes, some user, some operating system running concurrently on one or more CPUs
 - Concurrency by multiplexing the CPUs among the processes / threads







Process Management Activities

The operating system is responsible for the following activities in connection with process management:


- Creating and deleting both user and system processes
- Suspending and resuming processes
- Providing mechanisms for process synchronization
- Providing mechanisms for process communication
- Providing mechanisms for deadlock handling





Memory Management

- To execute a program all (or part) of the instructions must be in memory
- All (or part) of the data that is needed by the program must be in memory
- Memory management determines what is in memory and when
 - Optimizing CPU utilization and computer response to users
- Memory management activities
 - Keeping track of which parts of memory are currently being used and by whom
 - Deciding which processes (or parts thereof) and data to move into and out of memory
 - Allocating and deallocating memory space as needed





File-system Management

- OS provides uniform, logical view of information storage
 - Abstracts physical properties to logical storage unit - **file**
 - Each medium is controlled by device (i.e., disk drive, tape drive)
 - ▶ Varying properties include access speed, capacity, data-transfer rate, access method (sequential or random)


- File-System management
 - Files usually organized into directories
 - Access control on most systems to determine who can access what
 - OS activities include
 - ▶ Creating and deleting files and directories
 - ▶ Primitives to manipulate files and directories
 - ▶ Mapping files onto secondary storage
 - ▶ Backup files onto stable (non-volatile) storage media





Mass-Storage Management


- Usually disks used to store data that does not fit in main memory or data that must be kept for a “long” period of time
- Proper management is of central importance
- Entire speed of computer operation hinges on disk subsystem and its algorithms
- OS activities
 - Mounting and unmounting filesystems to file hierarchy
 - Free-space management
 - Storage allocation
 - Disk scheduling
 - Partitioning disks
 - Protection
- Some storage need not be fast
 - Tertiary storage includes optical storage, magnetic tape
 - Still must be managed – by OS or applications





Caching

- Important principle, performed at many levels in a computer (in hardware, operating system, software)
- Information in use copied from slower to faster storage temporarily
- Faster storage (cache) checked first to determine if information is there
 - If it is, information used directly from the cache (fast)
 - If not, data from slower storage copied to cache and then used there
- Cache smaller than storage being cached
 - Cache management important design problem
 - Cache size and replacement policy







Characteristics of Various Types of Storage

Level	1	2	3	4	5
Name	registers	cache	main memory	solid-state disk	magnetic disk
Typical size	< 1 KB	< 16MB	< 64GB	< 1 TB	< 10 TB
Implementation technology	custom memory with multiple ports CMOS	on-chip or off-chip CMOS SRAM	CMOS SRAM	flash memory	magnetic disk
Access time (ns)	0.25-0.5	0.5-25	80-250	25,000-50,000	5,000,000
Bandwidth (MB/sec)	20,000-100,000	5,000-10,000	1,000-5,000	500	20-150
Managed by	compiler	hardware	operating system	operating system	operating system
Backed by	cache	main memory	disk	disk	disk or tape


- Movement between levels of storage hierarchy can be explicit or implicit.
- Values based on data from around 2017






Migration of data “A” from Disk to Register

- Multitasking environments must be careful to use most recent value, no matter where it is stored in the storage hierarchy

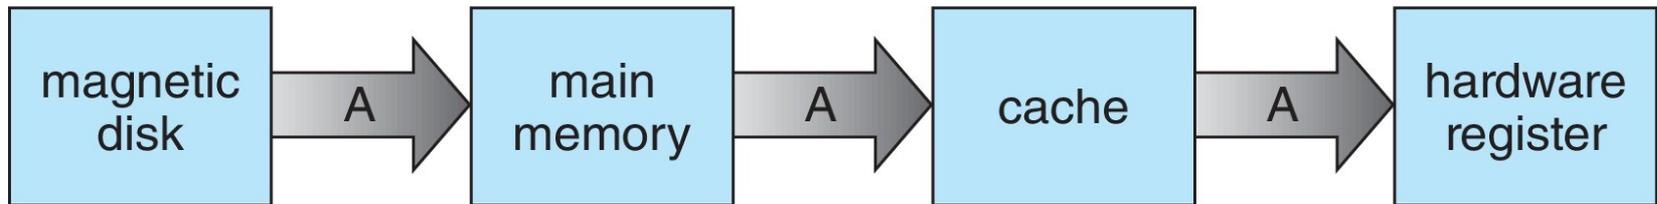


- Multiprocessor environment must provide **cache coherency** in hardware such that all CPUs have the most recent value in their cache
- Distributed environment situation even more complex
 - Several copies of a datum can exist
 - Various solutions covered in Chapter 19





I/O Subsystem


- One purpose of OS is to hide peculiarities of hardware devices from the user
- I/O subsystem responsible for
 - Memory management of I/O including buffering (storing data temporarily while it is being transferred), caching (storing parts of data in faster storage for performance), spooling (the overlapping of output of one job with input of other jobs)
 - General device-driver interface
 - Drivers for specific hardware devices





Protection and Security


- **Protection** – any mechanism for controlling access of processes or users to resources defined by the OS
- **Security** – defense of the system against internal and external attacks
 - Huge range, including denial-of-service, worms, viruses, identity theft, theft of service
- Systems generally first distinguish among users, to determine who can do what
 - User identities (**user IDs**, security IDs) include name and associated number, one per user
 - User ID then associated with all files, processes of that user to determine access control
 - Group identifier (**group ID**) allows set of users to be defined and controls managed, then also associated with each process, file
 - **Privilege escalation** allows user to change to effective ID with more rights





Computing Environments - Traditional


- Stand-alone general purpose machines
- But blurred as most systems interconnect with others (i.e., the Internet)
- **Portals** provide web access to internal systems
- **Network computers (thin clients)** are like Web terminals
- Mobile computers interconnect via **wireless networks**
- Networking becoming ubiquitous – even home systems use **firewalls** to protect home computers from Internet attacks





Computing Environments - Mobile



- Handheld smartphones, tablets, etc
- What is the functional difference between them and a “traditional” laptop?
- Extra feature – more OS features (GPS, gyroscope)
- Allows new types of apps like ***augmented reality***
- Use IEEE 802.11 wireless, or cellular data networks for connectivity
- Most common are **Apple iOS** and **Google Android**





Computing Environments – Client-Server


- Client-Server Computing
 - Dumb terminals supplanted by smart PCs
 - Many systems now **servers**, responding to requests generated by **clients**
 - ▶ **Compute-server system** provides an interface to client to request services (i.e., database)
 - ▶ **File-server system** provides interface for clients to store and retrieve files

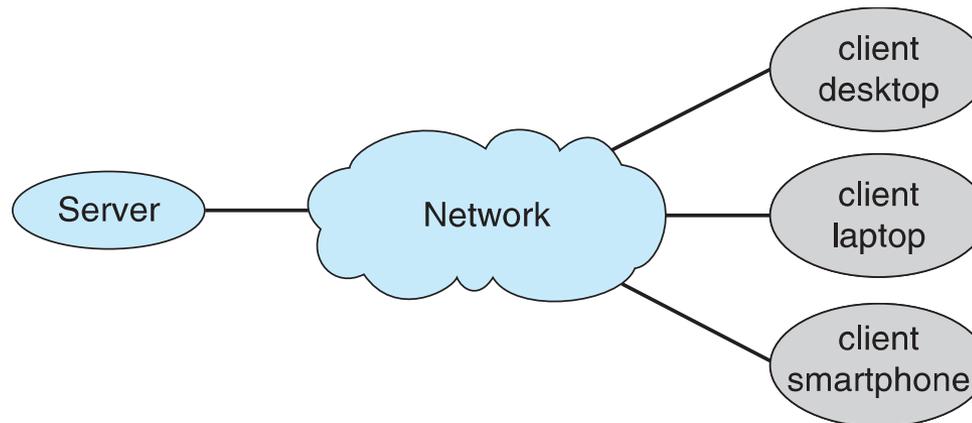



Free and Open-Source Operating Systems

- Operating systems made available in source-code format rather than just binary and free to modify, as opposed to **closed-source** and **proprietary**
- Counter to the **copy protection** and **Digital Rights Management (DRM)** movement
- UNIX was the first one.
- Promoted by **Free Software Foundation (FSF)**, which invented the first “copyleft” **GNU Public License (GPL)**
 - Free software and open-source software are two different ideas championed by different groups of people
- Examples include **GNU/Linux** and **BSD UNIX** (including core of **Mac OS X**), and many more
- Can use VMM like VMware Player (Free on Windows), Virtualbox (open source on many platforms - <http://www.virtualbox.com>)
 - Use to run guest operating systems for exploration





The Study of Operating Systems

There has never been a more interesting time to study operating systems, and it has never been easier. The open-source movement has overtaken operating systems, causing many of them to be made available in both source and binary (executable) format. The list of operating systems available in both formats includes Linux, BSD UNIX, Solaris, and part of macOS. The availability of source code allows us to study operating systems from the inside out. Questions that we could once answer only by looking at documentation or the behavior of an operating system we can now answer by examining the code itself.

Operating systems that are no longer commercially viable have been open-sourced as well, enabling us to study how systems operated in a time of fewer CPU, memory, and storage resources. An extensive but incomplete list of open-source operating-system projects is available from https://curlie.org/Computers/Software/Operating_Systems/Open_Source/

In addition, the rise of virtualization as a mainstream (and frequently free) computer function makes it possible to run many operating systems on top of one core system. For example, VMware (<http://www.vmware.com>) provides a free “player” for Windows on which hundreds of free “virtual appliances” can run. Virtualbox (<http://www.virtualbox.com>) provides a free, open-source virtual machine manager on many operating systems. Using such tools, students can try out hundreds of operating systems without dedicated hardware.

The advent of open-source operating systems has also made it easier to make the move from student to operating-system developer. With some knowledge, some effort, and an Internet connection, a student can even create a new operating-system distribution. Just a few years ago, it was difficult or impossible to get access to source code. Now, such access is limited only by how much interest, time, and disk space a student has.

